
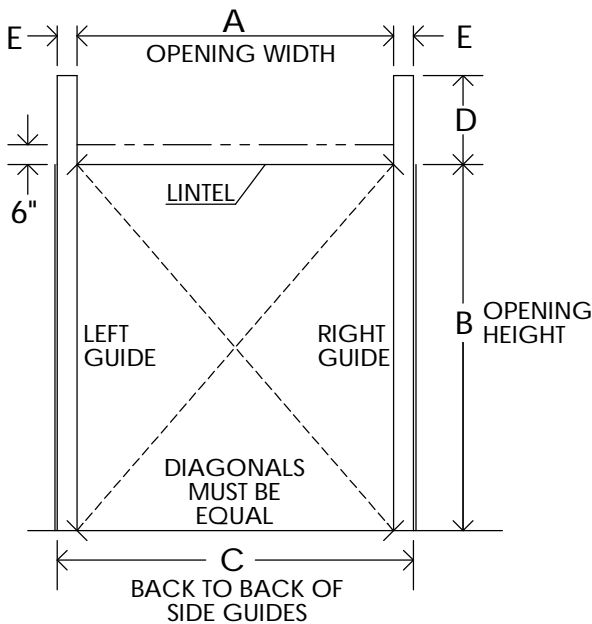


ELECTRICAL SPECIFICATIONS	
OPERATOR TYPE: NA	
HP	VOLT
PH	CY
NEMA:	
<input type="checkbox"/>	OPERATOR MOUNTED CONTROL PANELS
<input type="checkbox"/>	WALL MOUNTED CONTROL PANELS

STANDARD SPECIFICATIONS
MOTOR, BRAKE, AND REVERSING SWITCH ARE ALL
FACTORY PRE-WIRED TO TERMINAL STRIP
FACILITATE FIELD WIRING OF PUSH BUTTON
STATION. ONE INTERIOR PUSH BUTTON FURNISHED
STANDARD. POWER UNIT SUPPORT, ROLLER CHAIN,
SPROCKET, CHAINLOCK WITH PIN AND CHAIN,
ALL OPERATING CHAINS AND FASTENERS ARE
FURNISHED STANDARD. WIRE, CONDUIT, LINE FUSES
AND DISCONNECT SWITCHES BY OTHERS.

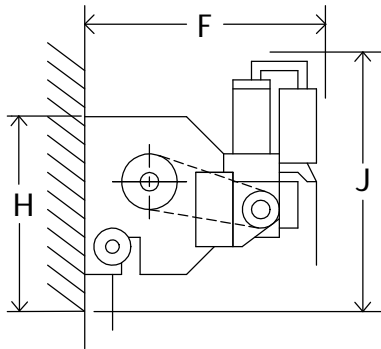

AVAILABLE EXTRAS	
<input type="checkbox"/>	PUSH BUTTON - NEMA-4
<input type="checkbox"/>	PULL CORD STATION-SINGLE ACTING
<input type="checkbox"/>	PNEUMATIC SAFETY EDGE
<input type="checkbox"/>	ELECTRIC SAFETY EDGE INCLUDED
<input type="checkbox"/>	FUSED DISCONNECT
<input type="checkbox"/>	ELECTRICAL INTERLOCK SWITCHES
<input type="checkbox"/>	EXPLOSION PROOF POWER UNIT
<input type="checkbox"/>	OPERATOR HOUSING
<input type="checkbox"/>	REMOTE CONTROL - SPECIFY
<input type="checkbox"/>	PHOTO EYES INCLUDED
<input type="checkbox"/>	TRAVELING WIND BAR
<input type="checkbox"/>	CHAIN HOIST OPERATED

DIMENSION TABLE		
MOUNTING	<input type="checkbox"/> INTERIOR	<input type="checkbox"/> EXTERIOR
HANDING	<input type="checkbox"/> LEFT HAND	<input type="checkbox"/> RIGHT HAND
QUANTITY: 1		
MARK	DIMENSION	DESCRIPTION
A		OPENING WIDTH
B		THRESHOLD TO UNDERSIDE OF LINTEL
C		BACK TO BACK OF SIDE GUIDES
D		UNDERSIDE OF LINTEL TO TOP OF GUIDE
E		MOUNTING GUIDE WIDTH
F		MINIMUM OVERHANG CLEARANCE
G		MINIMUM SIDE CLEARANCE
H		UNDERSIDE OF LINTEL TO TOP OF BRKT.
J		UNDERSIDE OF LINTEL TO TOP OF DRIVE

APPROVED BY. _____

WD WARREN DOOR SALES		
DATE.	JOB NO.	CHECKED
CUSTOMER.		
WD1000 GENERAL ARRGT.		WD -1000